

PERMIT AUTHORISATION REFERENCE: PPC / 132  
**Stoney Stanton Service Station**

Pollution Prevention and Control Act 1999  
Pollution Prevention and Control (England and Wales)  
Regulations 2000 as amended

Process Address	Stoney Stanton Service Station 384 Stoney Stanton Road Foleshill Coventry CV6 5GJ
Process Type	Petrol Filling Station
Current Operator	Stoney Stanton Service Station 384 Stoney Stanton Road Foleshill Coventry CV6 5GJ
Previous Operator	N/A
Date of Application	30 <sup>th</sup> September 1998
Date Permit Issued	August 2005

**POLLUTION PREVENTION & CONTROL ACT 1999  
POLLUTION PREVENTION & CONTROL (ENGLAND AND WALES)  
REGULATIONS 2000**

**DOCUMENT A : PERMIT**

**Stoney Stanton Service Station**

Reference Number **PPC/132**

Coventry City Council ("the Council") in accordance with Section 10(2) of the Pollution Prevention & Control (England and Wales) Regulations 2000 ("The Regulations"), hereby permits:

**Stoney Stanton Service Station**

Whose registered office is:

**384 Stoney Stanton Road  
Foleshill  
Coventry  
CV6 5GJ**

To operate a Part B installation, unloading petrol into stationary storage tanks, as prescribed in Part B of Section 1.2 of the Regulations at:

**Stoney Stanton Service Station  
384 Stoney Stanton Road  
Foleshill  
Coventry  
CV6 5GJ**

The permit is subject to the conditions specified in this document consisting of 11 pages and comprising documents A, B and C and plans PPC/132/A.

Signed...

A black rectangular box redacting the signature of Alan Bennett. There are handwritten initials 'M' and 'U' above the box.

Alan Bennett, Head of Environmental Health

A person authorised to sign on behalf of the Council

Dated .....14/09/05.....

## **SCOPE**

The installation comprises not just any relevant unit carrying out a Part B activity listed in Schedule 1 to the Regulations, but also directly associated activities which have a technical connection with that activity and which could have an effect on pollution.

All pollutant concentrations shall be expressed at reference conditions of 273K and 101.3kPa, without correction for water vapour content.

Technical Guidance documents used in the preparation of this document:

- Secretary of State's Guidance Note PG 1/14(04) - Secretary of State's Guidance for Unloading of Petrol into Storage at Petrol Stations.
- Secretary of State's Guidance – General Guidance Manual on Policy and Procedures for A2 and B installations. ISBN 0-85521-028-1

Date Annual Fee Required: 1st April of each financial year

Date For Full Compliance: Date permit issued

Permit Prepared By: Neil Wait  
Permit Checked By: Michelle Muller

## **LEGISLATION**

1. Pollution Prevention and Control Act 1999.
2. Pollution Prevention and Control Regulations 2000 as amended, schedule 1 as amended

## **BRIEF DESCRIPTION OF THE INSTALLATION REGULATED BY THIS PERMIT**

Definitions referred to in this permit

- An **Activity** is an industrial activity forming part of an installation. Different types of activity are listed within Schedule 1 of the PPC Regulations and are broadly broken down into industrial sectors. Other “associated” activities may also form part of an installation.
- An **Installation** comprises not just any relevant unit carrying out a B activity listed within Schedule 1 to the PPC Regulations, but also directly associated activities which have a technical connection with a schedule 1 activity and which could have an effect on pollution.
- An **Operator** is the person (e.g. a company or individual) who has control over the operation of an installation.
- **Volatile organic compound (VOC)** shall mean any organic compound having at 293K a vapour pressure of 0.01 kPa or more, or having a corresponding volatility under the particular conditions of use.
- **Organic solvent** shall mean any VOC which is used alone or in combination with other agents, and without undergoing a chemical change, to dissolve raw materials, products or waste materials, or is used as a cleaning agent to dissolve contaminants, or as a dissolver, or as a dispersion medium, or as a viscosity adjuster, or as a surface tension adjuster, or a plasticiser, or as a preservative.
- **Stack** includes structures and openings of any kind from or through which substances may be emitted to air.
- **Duct** includes enclosed structures through which gaseous substances may be conveyed.
- **Process vent** includes open terminations of ducts.
- **Authorised Officer** shall mean an officer authorised to carry out duties under the Pollution Prevention and Control Act 1999 and subordinate regulations
- **Logbook** shall mean any electronic or paper means of storage of the required information as agreed by the regulator
- **Local Authority** shall mean Coventry City Council
- "m" means metre
- "m/s" means metres per second

The location of the petrol storage tank vent pipes is marked in blue on the attached plan PPC/132/A. The Installation boundary is also marked in red on the attached plan PPC/132/A.

## **Description of Installation**

Petrol is delivered to the filling station via road tanker. Petrol is offloaded into storage tanks by delivery hose under supervision of a competent person. Vapours from the delivery system controlled by the vapour recovery system.

This service station has 4 petrol storage tanks and 2 diesel storage tanks

**Table 1**

**List of Process Areas within the Installation and Associated Emission Points, Pollutants of Concern and Abatement Plant Required**

<b>Row Number</b>	<b>Area/Machinery Identification</b>	<b>Pollutants Emitted</b>	<b>Emission Limit in Permit</b>	<b>Abatement Plant Required</b>
<b>1</b>	<b>4 petrol storage tanks</b>	<b>VOC's</b>	<b>None</b>	<b>Pressure relief valves and vapour recovery on delivery of fuel</b>

## DOCUMENT B

### CONDITIONS

All conditions shall have immediate effect unless stated otherwise.

#### 1. CONDITIONS

1.1 Vapours displaced by the delivery of petrol into storage installations at service stations shall be returned through a vapour tight connection line to the mobile container delivering the petrol. Unloading operations may not take place unless the arrangements are in place and properly functioning, subject to Conditions 1.3, 1.4 and 1.5.

1.2 The operator shall implement the schedule of preventative maintenance as appended to this authorisation.

1.3 All reasonably practicable steps shall be taken to prevent uncontrolled leaks of vapour from vents, pipes and connectors from occurring. The Authority shall be advised without delay of the circumstances of such a vapour leak if there is likely to be an effect on a local community, and in all cases such a vapour leak should be recorded in the log book required under Condition 1.24

In this condition and in Condition 1.4, a vapour leak means any leak of vapour excepting those which occur through the vent mentioned in Condition 1.11, during potentially hazardous pressurisation.

1.4 The operator shall advise the Authority of the corrective measures to be taken and the timescales over which they will be allowed to be implemented in the event of a vapour leak described in Condition 1.3.

1.5 Instances of vapour lock shall be recorded in the log book and under the circumstances detailed in Condition 1.3 be reported to the Authority.

1.6 The procedures in Conditions 1.2 to 1.5 inclusive shall be reviewed in light of any modifications that occur to the facilities. The Authority shall be advised of any proposed alteration to operating procedures.

1.7 The vapour collection systems shall be of a size and design, as approved by the Authority, to minimise vapour emission during the maximum petrol and vapour flow in accordance with Conditions 1.1 and 1.8 i.e. when most tank compartments are being simultaneously discharged.

(In the case of existing vapour collection systems, an assessment shall be made of the maximum number of tanks which can be discharged whilst still maintaining the integrity of the vapour collection system.)

1.8 The number of tanker compartments being discharged simultaneously shall not exceed 2, excluding the diesel compartments.

1.9 The connection points on the tank filling pipes and vapour return pipe shall be fitted with secure seals to reduce vapour leaks when not in active use. If apertures are provided on storage tanks for the use of a dipstick, these shall be securely sealed when not in use.

- 1.10 The fittings for delivery and vapour return pipes shall be different to prevent mis-connection.
- 1.11 Petrol storage tank vent pipe(s) shall be fitted with a pressure vacuum relief valve to minimise vapour loss during unloading and storage of petrol. (The pressure vacuum relief valve shall be sized and weighted to prevent vapour loss, except when the storage tanks are subject to potentially hazardous pressurisation.)
- 1.12 When connecting hoses prior to delivery, the vapour return hose shall be connected before any delivery hose. The vapour return hose shall be connected by the road tanker end first, and then at the storage tank end.
- 1.13 Adjacent to each vapour return connection point for the storage tank, there shall be a clearly legible and durable notice instructing 'Connect vapour return line before off-loading' or similar wording. The sign shall also refer to the maximum number of tanker compartments which may be unloaded simultaneously in accordance with Condition 1.8.
- 1.14 If dip testing of storage tanks or road tanker compartments is performed before delivery, the dip openings shall be securely sealed prior to the delivery taking place.
- 1.15 Road tanker compartment dip testing shall not be performed whilst the vapour hose is connected.
- 1.16 A competent person shall remain near the tanker and keep a constant watch on hoses and connections during unloading. (A competent person is one who has received training in accordance with Clauses 13 and 35 of the Secretary of State's Process Guidance Note PG1/14(04)).
- 1.17 All road tanker compartment and vent discharge valves shall be closed on completion of the delivery.
- 1.18 On completion of unloading, the vapour hose shall not be disconnected until the delivery hose has been discharged and disconnected. The delivery hose shall be disconnected at the road tanker first. The vapour return hose shall be disconnected at the storage tank end first.
- 1.19 All connection points shall be securely sealed after delivery.
- 1.20 If the storage tanks or road tanker compartments are dipped after delivery, the dip openings shall be securely sealed after dip testing.
- 1.21 Manhole entry points to storage tanks shall be kept securely sealed, except when maintenance and testing are being carried out which require entry to the tank.
- 1.22 Petrol delivery and vapour return lines shall be tested in accordance with the schedule as appended to this authorisation (or such other schedule as may be agreed by the regulator).
- 1.23 Pressure vacuum relief valves on petrol storage tank vents shall be checked for correct functioning, including extraneous matter, seating and corrosion at least once every three years.

- 1.24 The operator shall maintain a log book at the authorised premises incorporating details of all maintenance, examination and testing, inventory checking, installation and repair work carried out, along with details of training given to operating staff at the service station.

The log book shall also detail any suspected vapour leak together with action taken to deal with any leak, in accordance with Clauses 1.3, 1.4 and 1.5.

- 1.25 Venting of the petrol vapour shall be through the vent pipes marked A (in blue) on the attached plan Reference PPC/132/A

## **2.0 GENERAL OPERATIONS**

- 2.1 The operator shall undertake regular cleaning and preventative maintenance including inspection and repair/replacement on all plant and equipment concerned with the emission, capture, transport and control of emissions to atmosphere. Where necessary manufacturers guidelines shall be used to determine the regularity of maintenance. Records of preventative maintenance including inspections and any works undertaken shall be kept on site and made available to the local authority inspector on request.
- 2.2 Spares and consumables for plant and equipment used in the installation in particular that subject to continual use or wear shall be held on site or shall be available at short notice. Such plant or equipment shall not be used unless that plant or equipment is capable of working in accordance with the conditions of this permit.
- 2.3 Staff at all levels shall receive the necessary training and instruction in their duties relating to control of the activities and emissions to air. Records shall be kept which details all relevant training provided to staff, and these records shall be kept for a minimum of 2 years.
- 2.4 Any malfunction of plant or spillage of solvent based materials shall be remedied as soon as possible and process operations altered whilst the necessary work is undertaken.
- 2.5 Any incident likely to give rise to adverse atmospheric emissions or emissions that may have an impact on the local community shall be notified to the local authority immediately, and the details of incident including remedial action taken recorded in the process log book.
- 2.6 The operator shall make available on demand and without charge any of the records required to be kept by this permit.
- 2.7 If there is any intention to change any aspect of the prescribed installation from the description contained in the beginning of this permit, or any other aspect which may affect the substances or concentration or amount of substances being emitted to atmosphere, the operator shall notify the regulator of the proposed changes at least 4 weeks in advance before the changes take place.
- 2.8 Operators shall put in place some form of structured environmental management system (EMS), whether by adopting published standards (ISO 14001 or the EU Eco Management and Audit Scheme [EMAS]) or by setting up an EMS tailored to the nature and size of the particular process.



## **DOCUMENT C**

### **RESIDUAL DUTY**

In relation to any aspect of the process not regulated by specific conditions in this permit, then Best Available Techniques shall be used:

For the purposes of the Pollution Prevention and Control (England and Wales) Regulations 2000, “best available techniques” means the most effective and advanced stage in the development of activities and their methods of operation which indicates the practical suitability of particular techniques for providing in principle the basis for emission limit values designed to prevent and, where practicable, generally to reduce emissions and the impact on the environment as a whole; and for the purpose of this definition –

- a) “available techniques” means those techniques which have been developed on a scale which allows implementation in the relevant industrial sector, in the economically and technically viable conditions, taking into consideration the cost and advantages, whether or not the techniques are used or produced inside the United Kingdom, as long as they are reasonably accessible to the operator;
- b) “best” means, in relation to techniques, the most effective in achieving a high general level of protection of the environment as a whole;
- c) “techniques” includes both the technology used and the way in which the installation is designed, built, maintained, operated and decommissioned.

## **SUPPLEMENTARY NOTES**

These notes do not comprise part of the Permit PPC/ 132 but contain guidance relevant to the Permit.

### **Inspections and Powers of Entry**

Regular inspections will be carried out by officers of the Council (the Local Authority Inspectors) to check and ensure full compliance with the Permit conditions and residual duties. These inspections may be carried out without prior notice.

Under section 108(6) of the Environment Act 1995 authorised Local Authority Inspectors have been granted powers of entry into any premises for the purposes of discharging relevant duties.

### **Reviews**

The Local Authority has a statutory duty to review the permit at least once every 6 years or in the following circumstances set out in regulation 15 of the Pollution Prevention and Control regulations 2000:

- a) The pollution from the installation is of such significance that the existing emission limit values for the permit need to be revised or new emission limit values need to be included in the permit
- b) Substantial changes in BAT make it possible to reduce emissions from the installation or mobile plant significantly without imposing excessive costs; or
- c) Operational safety of the activities carried out in the installation or mobile plant requires other techniques to be used

### **Health and Safety**

This Permit is given in relation to the requirements of the Pollution Prevention and Control (England and Wales) Regulations 2000. It must not be taken to replace any workplace responsibilities the operator has under Health & Safety legislation. Whenever emission limits quoted in this Permit conflict with occupational exposure limits set under the Health and Safety at Work Act 1974 to secure the health, safety or welfare of persons at work, the tighter limit should prevail.

Installation must be operated in order to protect persons at work as well as the environment. In achieving conditions in this Permit the operator must not adopt any course of action that would put at risk the health, safety or welfare of persons at work.

### **Other Statutory Requirements**

This Permit does not detract from any other statutory requirement, such as the need to obtain planning permission, hazardous substances consent, discharge consent from the Environment Agency, building regulations approval, or a waste disposal licence.

This Permit does not authorise a contravention of any other enactment or any order made, granted or issued under any enactment, nor does it authorise a contravention of any rule or breach of any agreement.

The Operator is advised to consult the relevant Planning Department regarding changes that may be required as a result of this Permit (e.g. stack heights) as they may require planning permission.

### **Transfer of Permits**

Where the operator of an installation wishes to transfer, in whole or in part, his permit to another person, the operator and the proposed transferee shall jointly make an application to the regulator to effect the transfer. Such an application shall be accompanied by the permit and any fee prescribed in respect of the transfer.

In the case of partial transfer, where the original operator retains part of the permit, the application must make clear who will retain control over the various parts of the installation. The application must include a plan identifying which parts of the site and which activities the operator proposes transferring.

The local authority will then determine whether to allow the transfer within a two-month period, unless the local authority and the applicants agree a longer period. Where the local authority approves the transfer, the transfer will take effect from the date requested by the operator or a date that may be agreed by the local authority and the applicants.

### **Variation to Permits**

Variation to permits may be initiated either by the local authority or the operator, either in response to changes in the operation of an installation or if new conditions are needed to deal with new matters. Variations may be required in response to the following.

- Change of operation of the installation. (The operator shall notify the local authority under Section 16(1) of the Regulations.)
- In response to the findings of a periodic review of conditions.
- In response to the findings of an inspection.
- New or revised sector guidance notes

The operator should apply to the Local Authority in order to vary a permit under regulation 17 of the Regulations. The application must be in writing and, in accordance with Part 1 of Schedule 7 to the Regulations contain:

- The name, address and telephone number of the operator.
- The address of the installation.
- A correspondence address.
- A description of the proposed changes.
- An indication of the variations the operator would like to make.
- Any other information the operator wants the authority take account of.

### **Substantial Change**

A substantial change means, in relation to an installation, a change in operation, which in the opinion of the local authority may have significant negative effects on human beings or the environment.

Where the local authority deems that a proposed variation constitutes a substantial change, the operator will be informed of the process to follow.

### **Noise**

This Permit does not include reference to noise. Statutory noise nuisance is regulated separately under the provisions of Part III of the 1990 Act.

## Appeals


An Appeal can be made against the conditions in, or variations to this Permit as per Part IV of the Regulations. Appeals are made to the Planning Inspectorate who acts on behalf of the Secretary of State. Appeals against conditions within a Permit must be submitted within 6 months of the date of issue of the permit. Appeals against variation notices must be submitted within 2 months of the date of issue of the notice. Appeals should be despatched on the day they are dated and sent to:

The Planning Inspectorate  
Environmental Appeals Administration  
Room 4/19 – Eagle Wing  
Temple Quay House  
2 The Square  
Temple Quay  
BRISTOL  
BS1 6PN

## HMSO Publications

All HMSO publications can be ordered by telephone on Tel: 0870 600 5522,  
Fax: 0870 600 5533 or e-mail: [book.orders@tso.co.uk](mailto:book.orders@tso.co.uk)

Plan PPC/132/A Stoney Stanton Service Station

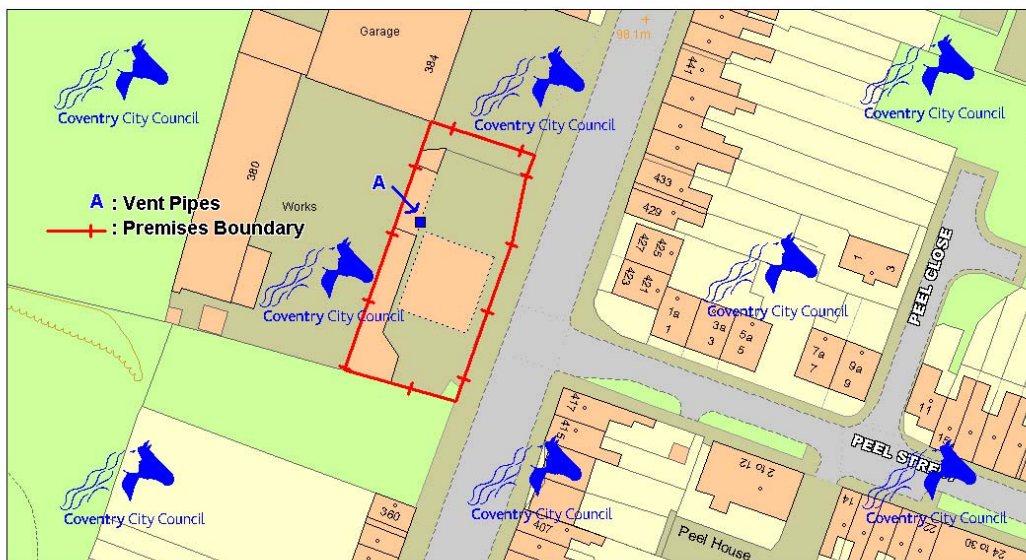

© Coventry City Council © NERC © Crown copyright. All rights reserved 100026294 (2005)  
© Landmark Information Group LM00080 & HLU0002 All rights reserved

City Services Directorate,  
Environmental Health,  
Environmental Protection,  
Broadgate House, Broadgate  
Coventry, CV1 1NH

Tel: 024 7683 1832



Reproduced from the Ordnance Survey  
mapping with the permission of the  
controller of Her Majesty's Stationery Office  
© Crown Copyright. Unauthorised  
reproduction infringes Crown Copyright  
and may lead to prosecution or civil proceedings.